



220-240V
50/60 Hz



IP
20



Suspended decorative luminaire for LED light sources.

TECHNICAL DATA

Mounting: suspended, on wire suspension (included)

Body: black glossy plastic material

Colour: black

ELECTRICAL DATA

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED

OPTICAL DATA

Way of lighting: direct

GENERAL DATA

Available on request: DIM 1..10V, DALI


Warranty: 5 years

Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
250013.5L01.111	120°	16	19	1710	1130	59	4000	≥80
250013.5L02.111	120°	16	19	1575	1040	55	3000	≥80
250013.5L03.112	120°	22	26	2280	1500	58	4000	≥80
250013.5L04.112	120°	22	26	2100	1380	53	3000	≥80

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L	Pallet quantity	Quantity in package	Net weight [kg]
250013.5L01.111	600 150 33	414	28	1	2.1
250013.5L02.111	600 150 33	414	28	1	2.1
250013.5L03.112	750 150 33	428	28	1	2.6
250013.5L04.112	750 150 33	428	28	1	2.6

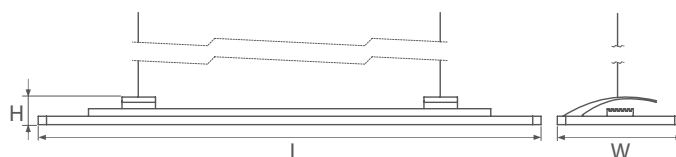

LIGHT BEAM CURVES



Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Date of issue: 15-6-2018

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

WAY OF LIGHTING

250013.5L01.111



Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Date of issue: 15-6-2018

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires