

Modern continuous line luminaire featuring LED light sources.

#### TECHNICAL DATA

**Mounting:** suspended, on wire suspension (on request), surface mounted

**Body:** aluminium profile

**Colour:** white

**Diffuser:** opal plexiglass (PLX)

#### ELECTRICAL DATA

**Power:** 220-240V 50/60Hz

**Includes light source:** yes

**Type of equipment:** STANDARD, DALI

**Electrical connection:** max 3x1,5 mm<sup>2</sup> wire, max 5x1,5 mm<sup>2</sup> wire

#### OPTICAL DATA

**Light distribution:** symmetric

**Way of lighting:** direct

#### GENERAL DATA

**Lifetime (L80B10):** 50 000 h

**Additional information:** through wiring

**Additional equipment:** included mounting bracket (2 pc. for 1m luminaire, 2 pcs. for 2m luminaire)


**Warranty:** 3 years

**Application:** shopping centers, supermarkets



Code	Replacement of conventional technology [W]	Degree of water and dust protection	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/ Ra	Operating temperature range [°C]
<b>Type of equipment: STANDARD</b>								
300081.00001	1x39W (46W)	IP20	32	3550	111	3000	≥80	0 ... +50
300081.00002	1x39W (46W)	IP20	32	3550	111	4000	≥80	0 ... +50
300081.00003	2x39W (92W)	IP20	64	7100	111	3000	≥80	0 ... +45
300081.00004	2x39W (92W)	IP20	64	7100	111	4000	≥80	0 ... +45
<b>Type of equipment: DALI</b>								
300081.00009	1x39W (46W)	IP20	33	3550	108	3000	≥80	0 ... +50
300081.00010	1x39W (46W)	IP20	33	3550	108	4000	≥80	0 ... +50
300081.00011	2x35W (84W)	IP20	65	7100	109	3000	≥80	0 ... +50
300081.00012	2x35W (84W)	IP20	65	7100	109	4000	≥80	0 ... +50

Code	Dimensions [mm] L W H	Pallet quantity	Net weight [kg]
<b>Type of equipment: STANDARD</b>			
300081.00001	1014 40 60	432	2.0
300081.00002	1014 40 60	432	2.0
300081.00003	2014 40 60	432	4.0
300081.00004	2014 40 60	432	4.0
<b>Type of equipment: DALI</b>			
300081.00009	1014 40 60	432	2.0
300081.00010	1014 40 60	432	2.0
300081.00011	2014 40 60	432	4.0
300081.00012	2014 40 60	432	4.0

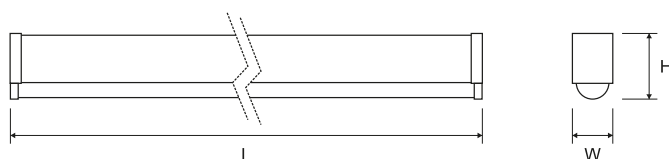


Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.lugbox24.com](http://www.lugbox24.com)

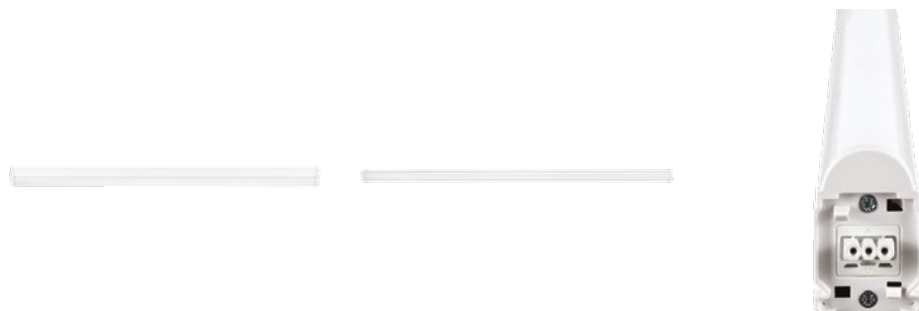**OTHER PICTURES****ACCESSORIES**

150230.00768

Asymmetrical aluminum mirror reflector (glossy)



150231.00791

LUGLINE LB LED Starter KIT 3-pole (1x power connector, 2x end cap, 2x cover masking for reflector, 1x user manual)




150230.00769

Double asymmetrical aluminum mirror reflector (glossy)




150231.00792

LUGLINE LB LED Starter KIT 5-pole (1x power connector, 2x end cap, 2x cover masking for reflector, 1x user manual)

**LIGHT BEAM CURVES****WAY OF LIGHTING**

300081.00001



Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.lugbox24.com](http://www.lugbox24.com)