



220-240V
50/60 HzIK
09IP
66

Industrial luminaire for LED light sources.

TECHNICAL DATA**Mounting:** surface mounted, in the ceiling, with mounting frame (sold separately), suspended, on chains (on request)**Body:** high pressure die-cast aluminum**Colour:** gray**Diffuser:** tempered glass**ELECTRICAL DATA****Power supply efficiency:** >95%**Power:** 220-240V 50/60Hz**Includes light source:** yes**Type of equipment:** ED, DALI**Electrical connection:** max 3x2,5 mm² wire, max 5x2,5 mm² wire**OPTICAL DATA****Light distribution:** rotationally-symmetric**Way of lighting:** direct**GENERAL DATA****Lifetime (L80B10):** 100 000 h**Lifetime (L90B10):** 50 000 h**Additional information:** Ball impact resistance. The possibility of using one or more power supplies in the luminaire.**Other remarks:** Beam angle: 100°**Warranty:** 3 years**Application:** warehouses, logistics centers, industrial facilities, sport facilities, roofing

Code	Replacement of conventional technology [W]	Type of equipment	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/ Ra	Operating temperature range [°C]
Type: Standard luminaire								
300092.00068	400W MH (480W)	ED	217	28600	132	4000	≥80	-40 ... +50
300092.00094	400W MH (480W)	DALI	217	28600	132	4000	≥80	-40 ... +45
Type: Luminaires for outdoor installation without roof								
300092.00123	400W MH (480W)	ED	217	28600	132	4000	≥80	-40 ... +50
300092.00124	400W MH (480W)	DALI	217	28600	132	4000	≥80	-40 ... +45

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L	Pallet quantity	Quantity in package	Net weight [kg]
Type: Standard luminaire					
300092.00068	675 398 90	590	30	1	11.0
300092.00094	675 398 90	590	30	1	11.0
Type: Luminaires for outdoor installation without roof					
300092.00123	675 398 90	590	30	1	11.0
300092.00124	675 398 90	590	30	1	11.0

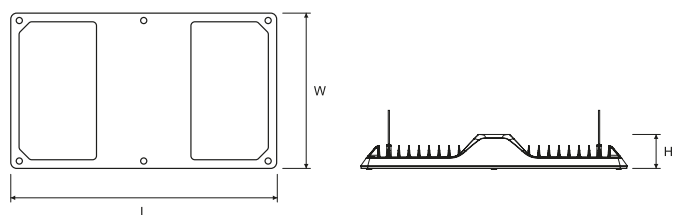

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Manufacturer does not provide suspension components.

Up-to-date product info available on our website www.lugbox24.com








Date of issue: 6-6-2018

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires


OTHER PICTURES



ACCESSORIES


	150020.00823	Adjustable mounting bracket		150021.00918	Frame for recessed mounting
	150020.00955	Adjustable mounting bracket for mounting without roof		150021.00941	Frame for recessed mounting without roof
	150020.00824	Bracket for surface mounting		150010.00974	Suspended frame for connecting two CRUISER 2 PLUS LED or CRUISER 2 PLUS LB LED luminaires
	150020.00956	Bracket for surface mounting without roof			

LIGHT BEAM CURVES



WAY OF LIGHTING

300092.00068



Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Manufacturer does not provide suspension components.

Up-to-date product info available on our website www.lugbox24.com

Date of issue: 6-6-2018

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires