



Modern recessed luminaire for modular suspended ceilings for LED light sources.

TECHNICAL DATA	Mounting: directly in the ceiling construction
	Body: powder-painted steel sheet
	Colour: white
	Diffuser: opal plexiglass (PLX)
ELECTRICAL DATA	Power supply efficiency: >89%
	Power: 220-240V 50/60Hz
	Includes light source: yes
	Type of equipment: STANDARD, EASY CONNECT, DALI EASY CONNECT, WIELAND, EM 3h EASY CONNECT
	Electrical connection: max 3x2,5 mm ² wire
OPTICAL DATA	Light distribution: rotationally-symmetric
	Way of lighting: direct
GENERAL DATA	Lifetime (L80B10): 50 000 h
	Operating temperature range: 0° C ... +35° C
	Warranty: 3 years
	Application: pathways, conference rooms



Code	Replacement of conventional technology [W]	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/ Ra	Light output in emergency mode [lm]
Type of equipment: STANDARD									
300061.00021	3x14W (57W)	22	24	3150	2600	108	3000	≥80	-
300061.00001	3x14W (57W)	22	24	3150	2600	108	4000	≥80	-
300061.00022	4x14/18W (76W/96W)	33	37	4500	3700	100	3000	≥80	-
300061.00002	4x14/18W (76W/96W)	33	37	4500	3700	100	4000	≥80	-
Type of equipment: EASY CONNECT									
300061.00067	3x14W (57W)	22	24	3150	2600	108	3000	≥80	-
300061.00068	3x14W (57W)	22	24	3150	2600	108	4000	≥80	-
300061.00069	4x14/18W (76W/96W)	33	37	4500	3700	100	3000	≥80	-
300061.00070	4x14/18W (76W/96W)	33	37	4500	3700	100	4000	≥80	-
Type of equipment: DALI EASY CONNECT									
300061.00041	3x14W (57W)	22	24	3150	2600	108	3000	≥80	-
300061.00043	3x14W (57W)	22	24	3150	2600	108	4000	≥80	-
300061.00044	4x14/18W (76W/96W)	33	37	4500	3700	100	3000	≥80	-
300061.00042	4x14/18W (76W/96W)	33	37	4500	3700	100	4000	≥80	-
Type of equipment: WIELAND									
300061.00025	3x14W (57W)	22	24	3150	2600	108	3000	≥80	-
300061.00005	3x14W (57W)	22	24	3150	2600	108	4000	≥80	-
300061.00026	4x14/18W (76W/96W)	33	37	4500	3700	100	3000	≥80	-
300061.00006	4x14/18W (76W/96W)	33	37	4500	3700	100	4000	≥80	-
Type of equipment: EM 3h EASY CONNECT									
300061.00027B	3x14W (57W)	22	29	3150	2600	90	3000	≥80	330
300061.00007B	3x14W (57W)	22	29	3150	2600	90	4000	≥80	330
300061.00028B	4x14/18W (76W/96W)	33	39	4500	3700	95	3000	≥80	330
300061.00008B	4x14/18W (76W/96W)	33	39	4500	3700	95	4000	≥80	330


Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.lugbox24.com

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W	Pallet quantity	Quantity in package	Net weight [kg]
Type of equipment: STANDARD					
300061.00021	595 595 60	600 600	50	1	3.1
300061.00001	595 595 60	600 600	50	1	3.1
300061.00022	595 595 60	600 600	50	1	3.1
300061.00002	595 595 60	600 600	50	1	3.1
Type of equipment: EASY CONNECT					
300061.00067	595 595 60	600 600	50	1	3.3
300061.00068	595 595 60	600 600	50	1	3.3
300061.00069	595 595 60	600 600	50	1	3.3
300061.00070	595 595 60	600 600	50	1	3.3
Type of equipment: DALI EASY CONNECT					
300061.00041	595 595 60	600 600	50	1	3.3
300061.00043	595 595 60	600 600	50	1	3.3
300061.00044	595 595 60	600 600	50	1	3.6
300061.00042	595 595 60	600 600	50	1	3.6
Type of equipment: WIELAND					
300061.00025	595 595 60	600 600	50	1	3.3
300061.00005	595 595 60	600 600	50	1	3.3
300061.00026	595 595 60	600 600	50	1	3.3
300061.00006	595 595 60	600 600	50	1	3.3
Type of equipment: EM 3h EASY CONNECT					
300061.00027B	595 595 60	600 600	50	1	4.0
300061.00007B	595 595 60	600 600	50	1	4.0
300061.00028B	595 595 60	600 600	50	1	4.0
300061.00008B	595 595 60	600 600	50	1	4.0

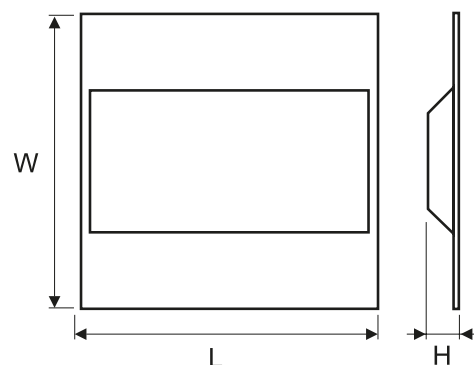

OTHER PICTURES



ACCESSORIES



150210.00605

Mounting frame for plasterboard
ceilings 595x595

300061.00080

WIELAND Pluggable electro-installation
3-Pole Female Connector


Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.lugbox24.com

LIGHT BEAM CURVES



WAY OF LIGHTING



OTHER PROJECTS



Supermarket Intermarche, Czarnków, Poland

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.lugbox24.com