

Modern surface mounted luminaire for LED light sources.

#### TECHNICAL DATA

**Mounting:** directly on the ceiling

**Body:** powder-painted steel sheet

**Colour:** white

#### ELECTRICAL DATA

**Power supply efficiency:** >90%

**Power:** 220-240V 50/60Hz

**Includes light source:** yes

**Type of equipment:** ED, EM 3h

**Electrical connection:** max 4x2,5 mm<sup>2</sup> wire

#### OPTICAL DATA

**Light distribution:** symmetric

**Way of lighting:** direct

**Louver:** mat aluminum, matt white aluminum

#### GENERAL DATA

**Lifetime (L80B10):** 50 000 h

**Operating temperature range:** 0°C ... +30°C

**Available on request:** DALI

**Warranty:** 3 years

**Application:** offices, hospitals, laboratories, supermarkets, classrooms, auditorium



Code	Replacement of conventional technology [W]	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/ Ra	UGR	Emergency kit	Light output in emergency mode [lm]	Operating temperature range [°C]
<b>Louver: mat aluminum</b>												
300061.00132	3x14W (57W)	26	29	3350	2800	97	3000	≥80	<17	no	-	0 ... +35
300061.00133	3x14W (57W)	26	29	3650	2900	100	4000	≥80	<17	no	-	0 ... +35
300061.00134	4x14W (76W)	35	39	4700	3700	95	3000	≥80	<17	no	-	0 ... +35
300061.00135	4x14W (76W)	35	39	4850	3850	99	4000	≥80	<17	no	-	0 ... +35
300061.00132B	3x14W (57W)	26	32	3550	2800	88	3000	≥80	<17	yes	260	0 ... +30
300061.00133B	3x14W (57W)	26	32	3650	2900	91	4000	≥80	<17	yes	275	0 ... +30
300061.00134B	4x14W (76W)	35	42	4700	3700	88	3000	≥80	<17	yes	350	0 ... +30
300061.00135B	4x14W (76W)	35	42	4850	3850	92	4000	≥80	<17	yes	370	0 ... +30
<b>Louver: matt white aluminum</b>												
300061.00136	3x14W (57W)	26	29	3550	2950	102	3000	≥80	<17	no	-	0 ... +35
300061.00137	3x14W (57W)	26	29	3650	3050	105	4000	≥80	<17	no	-	0 ... +35
300061.00138	4x14W (76W)	35	39	4700	3900	100	3000	≥80	<17	no	-	0 ... +35
300061.00139	4x14W (76W)	35	39	4850	4050	104	4000	≥80	<17	no	-	0 ... +35
300061.00136B	3x14W (57W)	26	32	3550	2950	92	3000	≥80	<17	yes	270	0 ... +30
300061.00137B	3x14W (57W)	26	32	3650	3050	95	4000	≥80	<17	yes	285	0 ... +30
300061.00138B	4x14W (76W)	35	42	4700	3900	93	3000	≥80	<17	yes	360	0 ... +30
300061.00139B	4x14W (76W)	35	42	4850	4050	96	4000	≥80	<17	yes	380	0 ... +30


Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.lugbox24.com](http://www.lugbox24.com)


Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W	Pallet quantity	Quantity in package	Net weight [kg]
<b>Louwer: mat aluminum</b>					
300061.00132	600 325 65	500 200	60	1	2.0
300061.00133	600 325 65	500 200	60	1	2.0
300061.00134	600 325 65	500 200	60	1	2.0
300061.00135	600 325 65	500 200	60	1	2.0
300061.00132B	600 325 65	500 200	44	1	2.3
300061.00133B	600 325 65	500 200	44	1	2.3
300061.00134B	600 325 65	500 200	44	1	2.3
300061.00135B	600 325 65	500 200	44	1	2.3
<b>Louwer: matt white aluminum</b>					
300061.00136	600 325 65	500 200	60	1	2.0
300061.00137	600 325 65	500 200	60	1	2.0
300061.00138	600 325 65	500 200	60	1	2.0
300061.00139	600 325 65	500 200	60	1	2.0
300061.00136B	600 325 65	500 200	44	1	2.3
300061.00137B	600 325 65	500 200	44	1	2.3
300061.00138B	600 325 65	500 200	44	1	2.3
300061.00139B	600 325 65	500 200	44	1	2.3

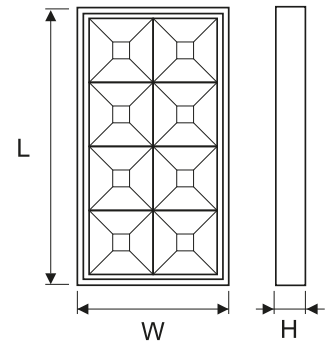

## OTHER PICTURES



## LIGHT BEAM CURVES

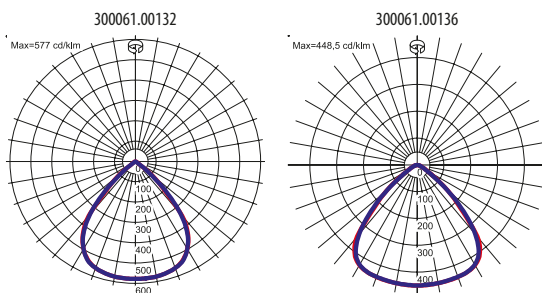

Luminous flux tolerance +/- 10%.  
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.  
Up-to-date product info available on our website [www.lugbox24.com](http://www.lugbox24.com)


**WAY OF LIGHTING**

---

300061.00132



300061.00136



Luminous flux tolerance +/- 10%.  
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.  
Up-to-date product info available on our website [www.lugbox24.com](http://www.lugbox24.com)