



Hermetic LED luminaire, water-jet proof, intended for mounting inside industrial and architectural objects.

TECHNICAL DATA

Mounting: directly on the ceiling, with mounting brackets (included), on wire suspension (on request)

Body: plastic

Colour: light gray

Diffuser: polycarbonate

ELECTRICAL DATA

Power supply efficiency: >90%

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED, EASY CONNECT

Electrical connection: max 3x2,5 mm² wire

OPTICAL DATA

Light distribution: omnidirectional

Way of lighting: direct

GENERAL DATA

Lifetime (L80B10): 100 000 h

Available on request: DALI, emergency module, available with connection to a central battery power supply, through wiring, radar motion detector, twilight sensor

Additional information: opal diffuser, various variants of the luminaire are available: with 22° optics, 60° optics, 30° Lower UGR optics, with transparent diffuser, plastic clips, 3h emergency module

Other remarks: diffuser to order


Warranty: 5 years

Application: parking areas, production halls, warehouses, assembly halls, warehouses, electricity plants, mills, workshops, swimming pools (facilities), wood and paper industry



Code	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
090380.5L01.111	32	4300	134	3000	≥80
090380.5L02.111	32	4600	144	4000	≥80
090380.5L03.111	45	5900	131	3000	≥80
090380.5L04.111	45	6400	142	4000	≥80
090380.5L05.111	51	6550	128	3000	≥80
090380.5L06.111	51	7050	138	4000	≥80

Code	Dimensions [mm] L W H	Mounting dimensions [mm] D	Pallet quantity	Net weight [kg]
090380.5L01.111	1245 100 90	766	120	1.7
090380.5L02.111	1245 100 90	766	120	1.7
090380.5L03.111	1245 100 90	766	120	1.7
090380.5L04.111	1245 100 90	766	120	1.7
090380.5L05.111	1245 100 90	766	120	1.7
090380.5L06.111	1245 100 90	766	120	1.7

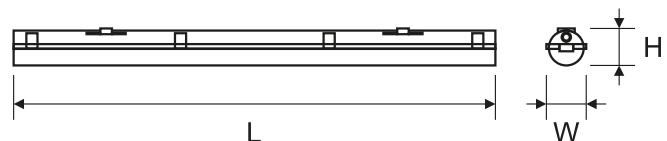

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com