


220-240V
50/60 HzIK
05IK
10IP
65IP
65/20

Suspended LED system equipped with one light chamber and two separate chambers for through wiring.

TECHNICAL DATA**Mounting:** suspended, on wire suspension (on request)**Body:** aluminium profile, luminaire body made of UV resistant polyester material reinforced with fibreglass**Colour:** gray**Diffuser:** acrylic (PMMA)**ELECTRICAL DATA****Power supply efficiency:** >90%**Power:** 220-240V 50/60Hz**Includes light source:** yes**Type of equipment:** ED, speaker 15W**Electrical connection:** max 5x2,5 mm² wire**OPTICAL DATA****Light distribution:** rotationally-symmetric**Way of lighting:** direct**GENERAL DATA****Lifetime (L80B10):** 50 000 h**Operating temperature range:** -25° C ... +30° C**Available on request:** DIM 1..10V, DALI, LED emergency module, radar motion detector**Additional equipment:** clips made of stainless steel**Warranty:** 5 years**Application:** metro, parking areas, industrial facilities, Railway stations

Code	IK	Degree of water and dust protection	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Type of equipment: ED									
130142.5L01.110	IK05	IP65	52	58	7400	6600	114	4000	≥80
130142.5L02.110	IK05	IP65	52	58	7100	6350	109	3000	≥80
Type of equipment: speaker 15W									
130142.5L01.111	IK05	IP65	52	58	7400	6600	114	4000	≥80
130142.5L02.111	IK05	IP65	52	58	7100	6350	109	3000	≥80
Type of equipment: -									
130142.0000.000	IK10	IP65/20	-	-	-	-	-	-	-

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
Type of equipment: ED				
130142.5L01.110	2000 275 245	12	1	23.0
130142.5L02.110	2000 275 245	12	1	23.0
Type of equipment: speaker 15W				
130142.5L01.111	2000 275 245	12	1	24.0
130142.5L02.111	2000 275 245	12	1	24.0
Type of equipment: -				
130142.0000.000	2000 275 245	-	-	27.0

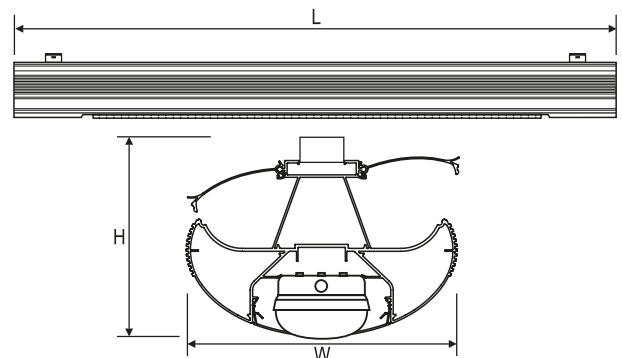

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

AVAILABLE VERSIONS



module including luminaire



module including luminaire and loudspeaker



empty module