

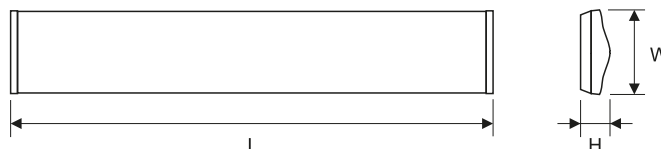

220-240V
50/60 HzIK
07IP
20

Modern surface mounted luminaire for LED light sources.

TECHNICAL DATA**Mounting:** directly on the ceiling**Body:** powder-painted steel sheet**Colour:** white**Diffuser:** acrylic (PMMA)**ELECTRICAL DATA****Power supply efficiency:** >91%**Power:** 220-240V 50/60Hz**Includes light source:** yes**Type of equipment:** ED**Electrical connection:** max 3x2,5 mm² wire**OPTICAL DATA****Light distribution:** symmetric**Way of lighting:** direct**GENERAL DATA****Lifetime (L80B10):** 50 000 h**Operating temperature range:** -20°C ... +30°C**Available on request:** through wiring**Warranty:** 5 years**Application:** classrooms, pathways, changing rooms

Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]
090311.5L01.111	34	41	4900	4300	105	4000
090311.5L02.111	49	58	7400	6400	110	4000

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W	Pallet quantity	Quantity in package	Net weight [kg]
090311.5L01.111	1265 220 82	1000 142	60	1	3.7
090311.5L02.111	1265 220 82	1000 142	60	1	3.7

**LIGHT BEAM CURVES**

Luminous flux tolerance +/- 10%.


Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

WAY OF LIGHTING

090311.5L01.111



Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com