

220-240V
50/60 HzIK
03IP
20

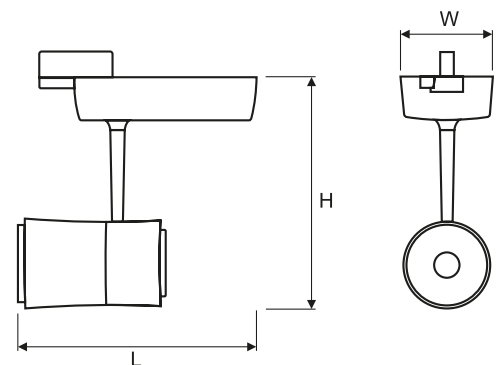
Modern, interior spotlight equipped with LED light sources, available in two colour temperatures.

TECHNICAL DATA**Mounting:** in 3-phase track**Body:** high pressure die-cast aluminum**Colour:** white, gray, black**ELECTRICAL DATA****Power supply efficiency:** >88%**Power:** 220-240V 50/60Hz**Includes light source:** yes**Type of equipment:** ED**OPTICAL DATA****Electrical connection:** in 3-phase track**Light distribution:** circular**Way of lighting:** direct**Reflector:** aluminum polished faceted**GENERAL DATA****Lifetime (L80B10):** 60 000 h**Warranty:** 5 years**Application:** boutiques, delicatessen, jeweler, shopping centers, supermarkets, museums

Code	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]
02021X.5L01.OX	27	2500	93	3000	≥80	0 ... +35
02021X.5L02.OX	27	2700	100	4000	≥80	0 ... +35
02021X.5L03.OX	37	3300	89	3000	≥80	0 ... +35
02021X.5L04.OX	37	3500	95	4000	≥80	0 ... +35

02021	□	.5L01.0	□
	Colour		Beam angle
1	□ white	1	19°
2	□ gray	2	33°
3	■ black		

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
02021X.5L01.OX	240 92 235	216	1	1.4
02021X.5L02.OX	240 92 235	216	1	1.4
02021X.5L03.OX	240 92 235	216	1	1.4
02021X.5L04.OX	240 92 235	216	1	1.4



Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

OTHER PICTURES**ACCESSORIES**

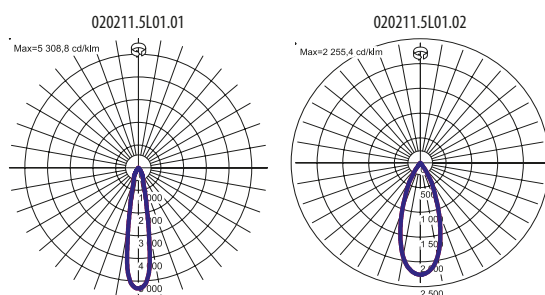
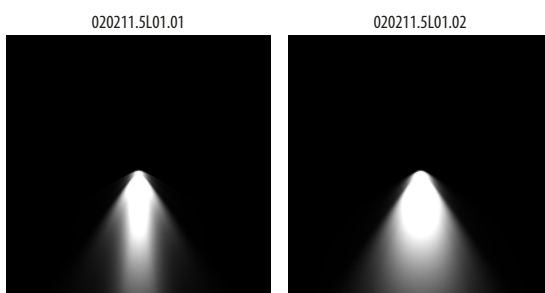
- 150091.00121
- 150092.00122
- 150093.00123

Mounting bases



- 150091.00124
- 150092.00125
- 150093.00126

Recessed box

LIGHT BEAM CURVES**WAY OF LIGHTING**

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

OTHER PROJECTS

Hamama Bilo, Tel Aviv, Israel



Giacomo Conti boutique, Zielona Gora, Poland

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Date of issue: 9-6-2018

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires