

220-240V
50/60 HzIK
04IP
20

Recessed modern downlight, for suspended ceilings with adjustable optics for integrated LED modules.

TECHNICAL DATA**Mounting:** in the ceiling, with mounting brackets (included)**Body:** high pressure die-cast aluminum**Colour:** white**ELECTRICAL DATA****Power supply efficiency:** >89%**Power:** 220-240V 50/60Hz**Includes light source:** yes**Type of equipment:** ED**OPTICAL DATA****Electrical connection:** max 2x1,5 mm² wire**Light distribution:** circular**Way of lighting:** direct**Reflector:** aluminum polished faceted**GENERAL DATA****Lifetime (L80B10):** 60 000 h**Available on request:** DALI**Warranty:** 5 years**Application:** boutiques, delicatessen, jeweler, shopping centers, supermarkets, museums

Code	Beam angle	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]
030361.5L01.301	11°	27	2500	93	3000	≥80	0 ... +35
030361.5L01.302	28°	27	2600	96	3000	≥80	0 ... +35
030361.5L01.303	39°	27	2500	93	3000	≥80	0 ... +35
030361.5L02.301	11°	28	2700	96	4000	≥80	0 ... +35
030361.5L02.302	28°	28	2750	98	4000	≥80	0 ... +35
030361.5L02.303	39°	28	2700	96	4000	≥80	0 ... +35
030361.5L03.301	11°	35	3400	97	3000	≥80	0 ... +35
030361.5L03.302	28°	35	3350	96	3000	≥80	0 ... +35
030361.5L03.303	39°	35	3350	96	3000	≥80	0 ... +35
030361.5L04.301	11°	35	3450	99	4000	≥80	0 ... +35
030361.5L04.302	28°	35	3500	100	4000	≥80	0 ... +35
030361.5L04.303	39°	35	3450	99	4000	≥80	0 ... +35
030361.5L05.301	11°	49	4050	83	3000	≥80	0 ... +25
030361.5L05.302	28°	49	4100	84	3000	≥80	0 ... +25
030361.5L05.303	39°	49	4050	83	3000	≥80	0 ... +25
030361.5L06.301	11°	49	4150	85	4000	≥80	0 ... +25
030361.5L06.302	28°	49	4250	87	4000	≥80	0 ... +25
030361.5L06.303	39°	49	4200	86	4000	≥80	0 ... +25


Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com


Code	Dimensions [mm] W H	Mounting dimensions [mm] W	Pallet quantity	Quantity in package	Net weight [kg]
030361.5L01.301	194 170	180	216	1	1.5
030361.5L01.302	194 170	180	216	1	1.5
030361.5L01.303	194 170	180	216	1	1.5
030361.5L02.301	194 170	180	216	1	1.5
030361.5L02.302	194 170	180	216	1	1.5
030361.5L02.303	194 170	180	216	1	1.5
030361.5L03.301	194 170	180	216	1	1.5
030361.5L03.302	194 170	180	216	1	1.5
030361.5L03.303	194 170	180	216	1	1.5
030361.5L04.301	194 170	180	216	1	1.5
030361.5L04.302	194 170	180	216	1	1.5
030361.5L04.303	194 170	180	216	1	1.5
030361.5L05.301	194 170	180	216	1	1.5
030361.5L05.302	194 170	180	216	1	1.5
030361.5L05.303	194 170	180	216	1	1.5
030361.5L06.301	194 170	180	216	1	1.5
030361.5L06.302	194 170	180	216	1	1.5
030361.5L06.303	194 170	180	216	1	1.5



OTHER PICTURES



LIGHT BEAM CURVES

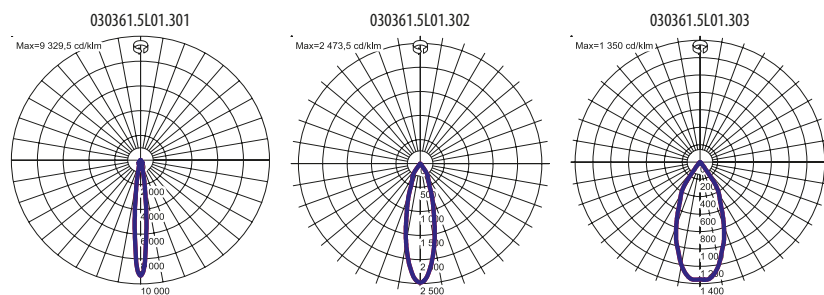


Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

WAY OF LIGHTING


030361.5L01.301



030361.5L01.302



030361.5L01.303

**OTHER PROJECTS**

Supermarket Intermarche, Bukowna, Poland

FLAIR MODE boutique, Vendaam Shopping Mall, Groningen, The Netherlands

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Date of issue: 9-6-2018

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires