


Recessed modern downlight, for suspended ceilings for integrated LED modules.

| | |
|------------------------|---|
| TECHNICAL DATA | Mounting: in the ceiling, with mounting brackets (included) Body: high pressure die-cast aluminum Colour: black and white |
| ELECTRICAL DATA | Power supply efficiency: >85% Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED Electrical connection: max 2x1,5 mm ² wire |
| OPTICAL DATA | Light distribution: circular Way of lighting: direct Reflector: aluminum polished faceted |
| GENERAL DATA | Lifetime (L80B10): 40 000 h Operating temperature range: 0°C ... +35°C Available on request: DALI Additional information: The possibility of using one or more power supplies in the luminaire. Additional equipment: lamp rings made of black die-cast aluminium Warranty: 5 years Application: boutiques, delicatessen, supermarkets, jeweler, museums, reception desks, restaurants |



| Code | Beam angle | Power LED [W] | Luminaire power [W] | Lumen LED [lm] | Lumen luminaire [lm] | Efficacy [lm/W] | Colour temperature [K] | CRI/Ra |
|-----------------|------------|---------------|---------------------|----------------|----------------------|-----------------|------------------------|--------|
| 030321.5L21.331 | 22° | 2x16 | 36 | 4000 | 3000 | 83 | 3000 | ≥80 |
| 030321.5L21.332 | 30° | 2x16 | 36 | 4000 | 2900 | 81 | 3000 | ≥80 |
| 030321.5L21.333 | 42° | 2x16 | 36 | 4000 | 2900 | 81 | 3000 | ≥80 |
| 030321.5L22.331 | 22° | 2x16 | 36 | 4000 | 3000 | 83 | 4000 | ≥80 |
| 030321.5L22.332 | 30° | 2x16 | 36 | 4000 | 2900 | 81 | 4000 | ≥80 |
| 030321.5L22.333 | 42° | 2x16 | 36 | 4000 | 2900 | 81 | 4000 | ≥80 |
| 030321.5L23.341 | 22° | 2x26 | 60 | 6000 | 4700 | 78 | 3000 | ≥80 |
| 030321.5L23.342 | 30° | 2x26 | 60 | 6000 | 4500 | 75 | 3000 | ≥80 |
| 030321.5L23.343 | 42° | 2x26 | 60 | 6000 | 4600 | 77 | 3000 | ≥80 |
| 030321.5L24.341 | 22° | 2x25 | 58 | 6000 | 4700 | 81 | 4000 | ≥80 |
| 030321.5L24.342 | 30° | 2x25 | 58 | 6000 | 4500 | 78 | 4000 | ≥80 |
| 030321.5L24.343 | 42° | 2x25 | 58 | 6000 | 4600 | 79 | 4000 | ≥80 |

| Code | Dimensions [mm] L W H | Mounting dimensions [mm] W H | Pallet quantity | Quantity in package | Net weight [kg] |
|-----------------|-----------------------|------------------------------|-----------------|---------------------|-----------------|
| 030321.5L21.331 | 280 140 105 | 125 265 | 220 | 1 | 1.7 |
| 030321.5L21.332 | 280 140 105 | 125 265 | 220 | 1 | 1.7 |
| 030321.5L21.333 | 280 140 105 | 125 265 | 220 | 1 | 1.7 |
| 030321.5L22.331 | 280 140 105 | 125 265 | 220 | 1 | 1.7 |
| 030321.5L22.332 | 280 140 105 | 125 265 | 220 | 1 | 1.7 |
| 030321.5L22.333 | 280 140 105 | 125 265 | 220 | 1 | 1.7 |
| 030321.5L23.341 | 330 165 120 | 155 320 | 220 | 1 | 2.0 |
| 030321.5L23.342 | 330 165 120 | 155 320 | 220 | 1 | 2.0 |
| 030321.5L23.343 | 330 165 120 | 155 320 | 220 | 1 | 2.0 |
| 030321.5L24.341 | 330 165 120 | 155 320 | 220 | 1 | 2.0 |
| 030321.5L24.342 | 330 165 120 | 155 320 | 220 | 1 | 2.0 |

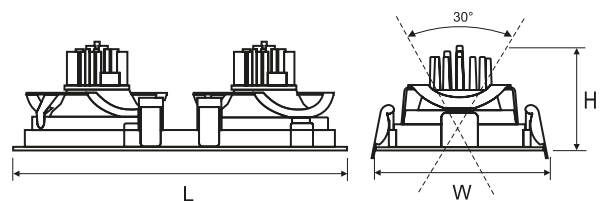

Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

| Code | Dimensions [mm] L W H | Mounting dimensions [mm] W H | Pallet quantity | Quantity in package | Net weight [kg] |
|-----------------|-----------------------------|------------------------------------|--------------------|---------------------------|-----------------------|
| 030321.5L24.343 | 330 165 120 | 155 320 | 220 | 1 | 2.0 |

OTHER PICTURES



Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com