

220-240V  
50/60 HzIK  
04IP  
20

Modern pendant luminaire for LED light sources.

## TECHNICAL DATA

**Mounting:** suspended, on wire suspension (on request)

**Body:** aluminium profile

**Colour:** gray

**Diffuser:** opal plexiglass (PLX)

## ELECTRICAL DATA

**Power supply efficiency:** >85%

**Power:** 220-240V 50/60Hz

**Includes light source:** yes

**Type of equipment:** ED

**Electrical connection:** max 3x2,5 mm<sup>2</sup> wire

**Way of lighting:** direct

**Lifetime (L80B10):** 50 000 h

## OPTICAL DATA

## GENERAL DATA


**Operating temperature range:** 0° C ... +35° C

**Additional information:** The possibility of using one or more power supplies in the luminaire.

**Additional equipment:** plastic end caps


**Warranty:** 5 years

**Application:** offices, hotels, reception desks, classrooms, auditorium, boutiques, museums

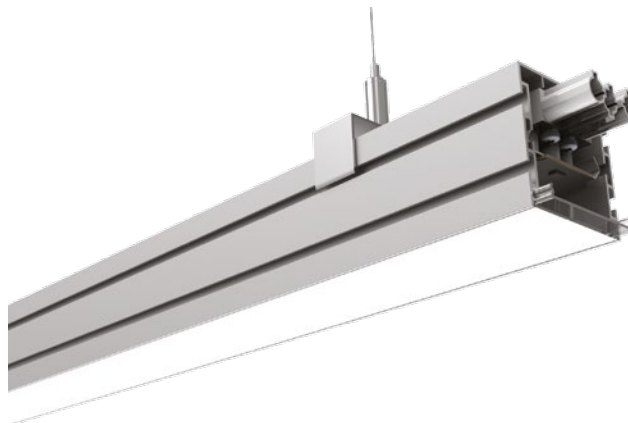

Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
010412.5L01.241	16	18	2250	1825	101	4000	≥80
010412.5L02.242	33	36	4500	3610	100	4000	≥80
010412.5L03.243	83	92	12400	9050	98	4000	≥80

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
010412.5L01.241	600 50 50 440	120	1	1.2
010412.5L02.242	1200 50 50 1000	80	1	2.0
010412.5L03.243	3000 50 50 2800	80	1	5.0

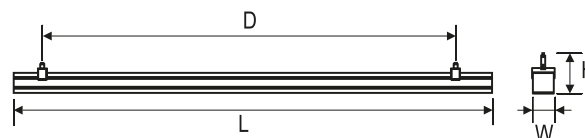

## ACCESSORIES



150032.00980

Connector



150032.00032

Module end caps for ARGUS ONE SYSTEM (set of 2 pcs)

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website [www.luglightfactory.com](http://www.luglightfactory.com)