


220-240V  
50/60 HzIK  
04IP  
44

Modern pendant luminaire for LED light sources.

**TECHNICAL DATA****Mounting:** suspended, on wire suspension (on request)**Body:** aluminium profile**Colour:** gray**Diffuser:** opal plexiglass (PLX)**ELECTRICAL DATA****Power supply efficiency:** >86%**Power:** 220-240V 50/60Hz**Includes light source:** yes**Type of equipment:** ED**Electrical connection:** max 3x0,75 mm<sup>2</sup> wire**Light distribution:** rotationally-symmetric**Way of lighting:** direct**OPTICAL DATA****GENERAL DATA****Lifetime (L80B10):** 50 000 h**Operating temperature range:** 0°C ... +35°C**Available on request:** DALI, LED emergency module**Additional equipment:** plastic end caps (included)**Warranty:** 5 years**Application:** offices, hotels, reception desks, classrooms, auditorium, boutiques, museums

Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
010122.5L01.141	29	34	4200	3100	91	3000	≥80
010122.5L02.141	29	34	4500	3400	100	4000	≥80
010122.5L03.142	59	68	8400	6200	91	3000	≥80
010122.5L04.142	59	68	9000	6800	100	4000	≥80

Code	Dimensions [mm] L W H D	Pallet quantity	Quantity in package	Net weight [kg]
010122.5L01.141	1200 50 50 1000	204	1	2.0
010122.5L02.141	1200 50 50 1000	204	1	2.0
010122.5L03.142	2400 50 50 2000	204	1	3.9
010122.5L04.142	2400 50 50 2000	204	1	3.9

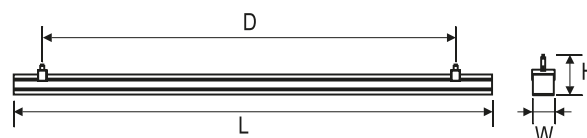**ACCESSORIES**

150060.00062

Suspension hanger MINI


☐ 150061.00066  
☐ 150062.00067

Mechanical round suspension with supply connector


☐ 150061.00063  
☐ 150062.00064

Mechanical round suspension


Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.


Up-to-date product info and General Warranty Terms available on our website [www.luglightfactory.com](http://www.luglightfactory.com)

## LIGHT BEAM CURVES



## WAY OF LIGHTING

010122.5L01.141



Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website [www.luglightfactory.com](http://www.luglightfactory.com)