


Single-function luminaire of emergency lighting luminaire for LED light sources, optics either in corridor or open-space interiors versions.

TECHNICAL DATA	Mounting: suspended, on wire suspension (on request) Body: aluminium profile Colour: gray Diffuser: opal plexiglass (PLX)
ELECTRICAL DATA	Power supply efficiency: >60% Power: 220-240V 50/60Hz Includes light source: yes Electrical connection: max 3x0,75 mm ² wire
OPTICAL DATA	Light distribution: asymmetric, circular Way of lighting: direct Type of optic: for corridors, for offices
GENERAL DATA	Additional equipment: plastic end caps Warranty: 5 years Application: car showrooms, boutiques, shopping centers, museums, galleries, open-space areas, pathways

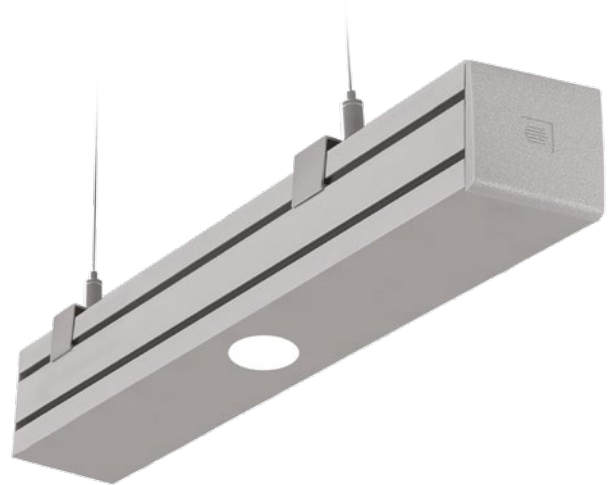


Code	Power LED [W]	Luminaire power [W]	Colour temperature [K]	CRI/Ra	Light output in emergency mode [lm]
Type of optic: for corridors					
010122.5L05X.111.901	3	5	3000	≥80	100%
Type of optic: for offices					
010122.5L06X.112.901	3	5	3000	≥80	100%

010122.5L05 .111.901

Emergency mode

- I 1h, single function with self-test
- J 3h, single function with self-test


Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
Type of optic: for corridors				
010122.5L05X.111.901	360 50 50	396	1	0.7
Type of optic: for offices				
010122.5L06X.112.901	360 50 50	396	1	0.7

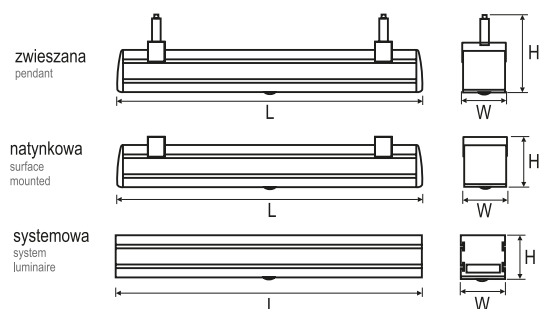

Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

AVAILABLE VERSIONS

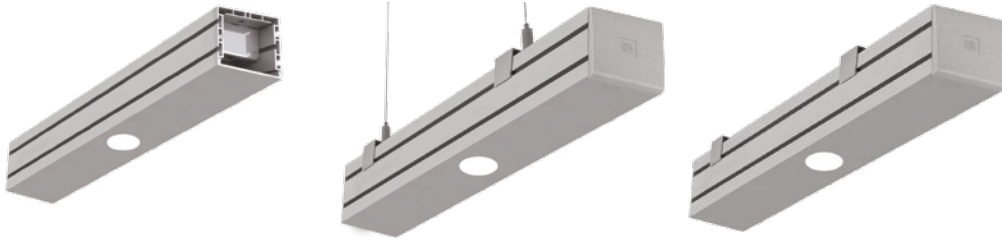


ACCESSORIES




150030.00033

Set of connecting elements

LIGHT BEAM CURVES

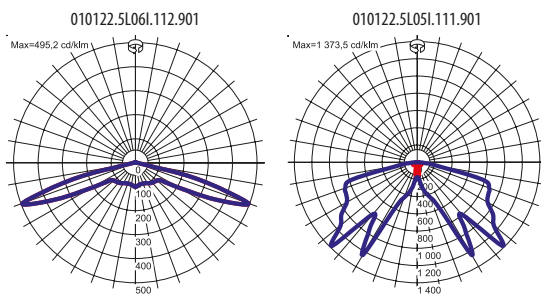

WAY OF LIGHTING

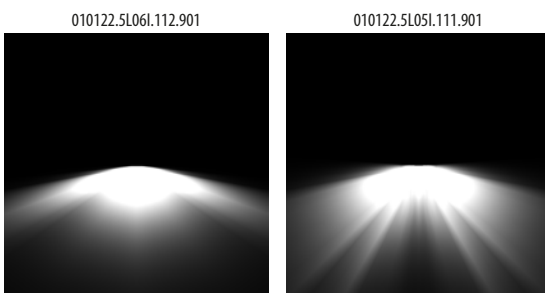

Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com