


220-240V
50/60 HzIP
20

Decorative luminaire featuring high quality LED light sources, available in two sizes.

TECHNICAL DATA**Mounting:** suspended, on wire suspension (included)**Body:** powder-painted steel sheet**Colour:** gray**ELECTRICAL DATA****Power supply efficiency:** >84%**Power:** 220-240V 50/60Hz**Includes light source:** yes**Type of equipment:** ED**OPTICAL DATA****Electrical connection:** max 3x2,5 mm² wire**Light distribution:** circular**Way of lighting:** direct**Reflector:** polished**GENERAL DATA****Lifetime (L70B50):** 60 000 h**Operating temperature range:** 0°C ... +35°C**Available on request:** LED emergency module**Warranty:** 5 years**Application:** hotels, reception desks, restaurants, conference rooms, museums

Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
010172.5L01.111	11	13	1100	800	62	3000	≥80
010172.5L02.111	10	12	1100	800	67	4000	≥80
010172.5L03.111	21	24	2000	1460	61	3000	≥80
010172.5L04.111	19	22	2000	1460	66	4000	≥80
010172.5L01.112	11	13	1100	800	62	3000	≥80
010172.5L02.112	10	12	1100	800	67	4000	≥80
010172.5L03.112	21	24	2000	1460	61	3000	≥80
010172.5L04.112	19	22	2000	1460	66	4000	≥80

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
010172.5L01.111	180 180 300	96	1	4.4
010172.5L02.111	180 180 300	96	1	4.4
010172.5L03.111	180 180 300	96	1	4.4
010172.5L04.111	180 180 300	96	1	4.4
010172.5L01.112	180 180 400	72	1	5.0
010172.5L02.112	180 180 400	72	1	5.0
010172.5L03.112	180 180 400	72	1	5.0
010172.5L04.112	180 180 400	72	1	5.0

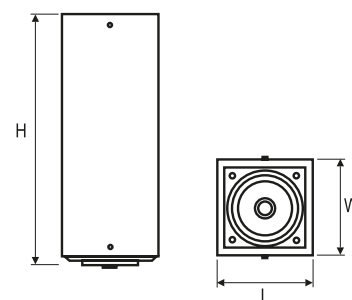


Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.


Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

LIGHT BEAM CURVES



WAY OF LIGHTING

010172.5L01.111



Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com