



220-240V
50/60 Hz



IP
20



Decorative luminaire featuring high quality LED light sources.

TECHNICAL DATA

Mounting: directly on the wall
Body: powder-painted steel sheet
Colour: gray

ELECTRICAL DATA

Power supply efficiency: >84%
Power: 220-240V 50/60Hz
Includes light source: yes
Type of equipment: ED
Electrical connection: max 3x2,5 mm² wire

OPTICAL DATA

Light distribution: circular
Way of lighting: direct
Reflector: polished


GENERAL DATA

Lifetime (L70B50): 60 000 h
Operating temperature range: 0°C ... +35°C
Available on request: LED emergency module
Warranty: 5 years
Application: hotels, reception desks, conference rooms, museums



Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
010172.5L01.611	11	13	1100	800	62	3000	≥80
010172.5L02.611	10	12	1100	800	67	4000	≥80
010172.5L03.611	21	24	2000	1460	61	3000	≥80
010172.5L04.611	19	22	2000	1460	66	4000	≥80

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
010172.5L01.611	225 180 300	100	1	4.5
010172.5L02.611	225 180 300	100	1	4.5
010172.5L03.611	225 180 300	100	1	4.5
010172.5L04.611	225 180 300	100	1	4.5

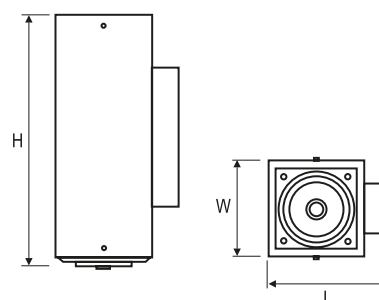


Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

LIGHT BEAM CURVES



WAY OF LIGHTING



Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com