

220-240V
50/60 HzIK
00IP
20

Modern indoor projector, for high quality LED light sources.

TECHNICAL DATA

Mounting: in 3-phase track

Body: die-cast aluminum

Colour: black and white, white, black

ELECTRICAL DATA

Power supply efficiency: >88%

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED

OPTICAL DATA

Electrical connection: in 3-phase track

Light distribution: circular

Way of lighting: direct

Reflector: aluminum polished faceted

GENERAL DATA

Lifetime (L80B10): 60 000 h

Available on request: DALI

Warranty: 5 years

Application: boutiques, delicatessen, jeweler, shopping centers, supermarkets, museums




Code	Beam angle	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]
02014X.5L01.03	15°	28	2750	98	3000	≥80	0 ... +35
02014X.5L02.03	15°	28	2900	104	4000	≥80	0 ... +35
02014X.5L01.04	26°	28	2700	96	3000	≥80	0 ... +35
02014X.5L02.04	26°	28	2850	102	4000	≥80	0 ... +35
02014X.5L01.05	38°	28	2850	102	3000	≥80	0 ... +35
02014X.5L02.05	38°	28	3000	107	4000	≥80	0 ... +35
02014X.5L03.03	15°	41	4000	98	3000	≥80	0 ... +35
02014X.5L04.03	15°	41	4300	105	4000	≥80	0 ... +35
02014X.5L03.04	26°	41	4100	100	3000	≥80	0 ... +35
02014X.5L04.04	26°	41	4200	102	4000	≥80	0 ... +35
02014X.5L03.05	38°	41	4350	106	3000	≥80	0 ... +35
02014X.5L04.05	38°	41	4500	110	4000	≥80	0 ... +35

02014 .5L01.03

Colour

0 white-black1 white3 black

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
02014X.5L01.03	206 159 146	175	1	2.3
02014X.5L02.03	206 159 146	175	1	2.3
02014X.5L01.04	206 159 146	175	1	2.3
02014X.5L02.04	206 159 146	175	1	2.3
02014X.5L01.05	206 159 146	175	1	2.3
02014X.5L02.05	206 159 146	175	1	2.3
02014X.5L03.03	206 159 146	175	1	2.3
02014X.5L04.03	206 159 146	175	1	2.3
02014X.5L03.04	206 159 146	175	1	2.3

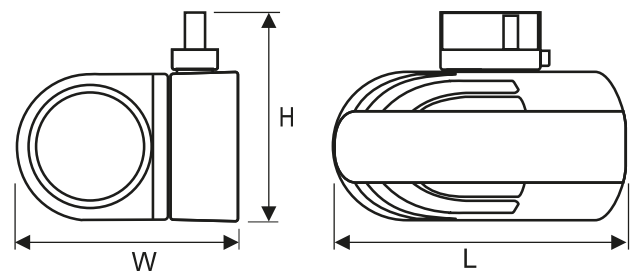

Luminous flux tolerance +/- 10%.


Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
02014X.5L04.04	206 159 146	175	1	2.3
02014X.5L03.05	206 159 146	175	1	2.3
02014X.5L04.05	206 159 146	175	1	2.3

OTHER PICTURES

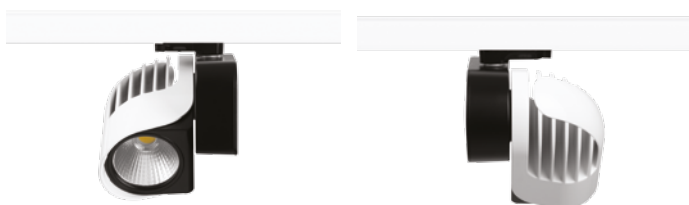

ACCESSORIES



- 150091.00121
- 150092.00122
- 150093.00123


Mounting bases




- 150091.00124
- 150092.00125
- 150093.00126

Recessed box

LIGHT BEAM CURVES

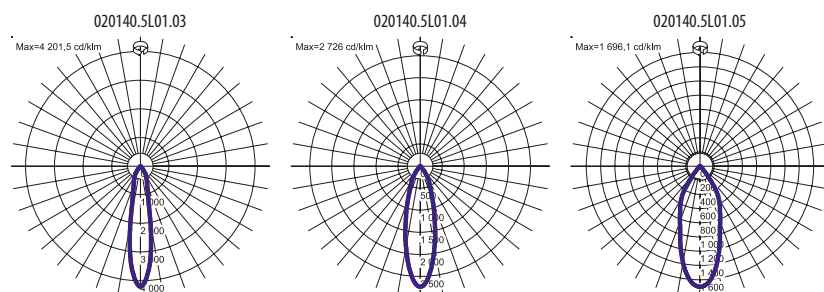

WAY OF LIGHTING

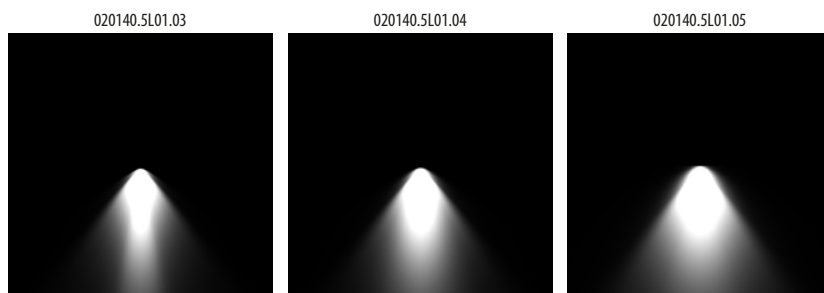

Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

OTHER PROJECTS

TEAM SPORTIA sports shopping, Jönköping, Sweden



PRO-Interior showroom, Poznan, Poland

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com